

6

5

4


3

2


1

D

D

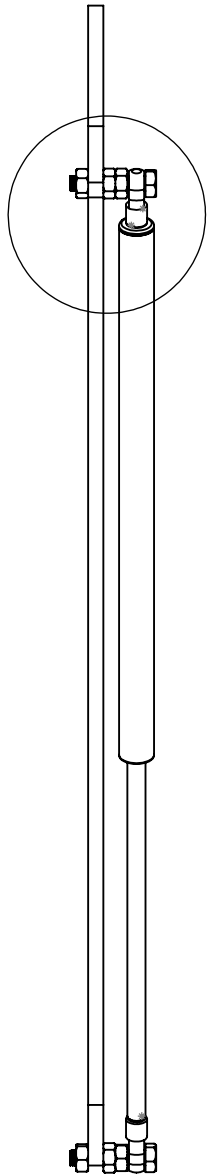

A

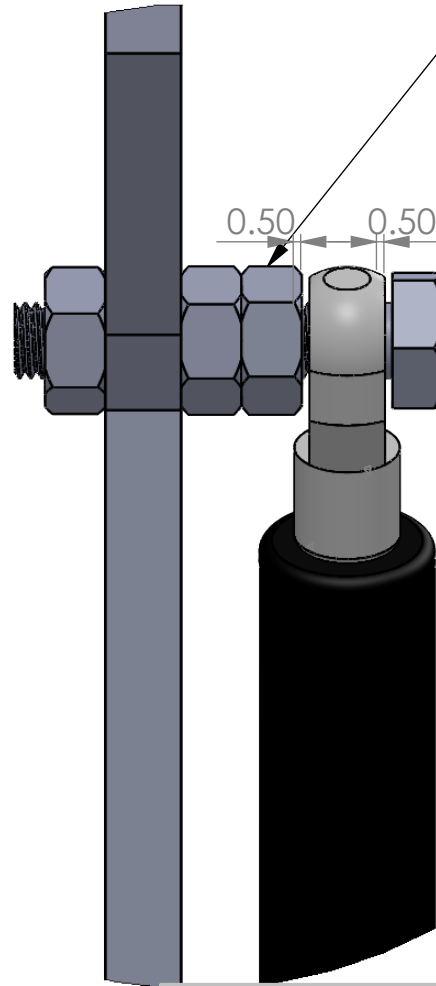

ENSURE LOCKNUT IS TIGHTENED TOWARDS TRAILER FRONT SIDE RETAINING NUT AND NOT THE EYELET OF THE STRUT TO ALLOW FOR FREE ROTATIONAL MOVEMENT WHEN OPENING/CLOSING TRAILER.

FAILURE TO DO SO WILL LIMIT LIFTING OF TRAILER TOP, BOWING OF STRUTS AND MECHANICAL FAILURE OF THE THREAD ATTACHING THE EYELET TO THE GAS STRUT BODY AND/OR ROD.

MINIMUM CLEARANCE OF 1MM TOTAL IS REQUIRED. (THE STRUT WILL NOT RATTLE ON THE PIVOT DUE TO THE GAS PRELOAD PROVIDED BY THE STRUT.)

UNLESS OTHERWISE SPECIFIED:  
DIMENSIONS ARE IN MILLIMETERS  
SURFACE FINISH:  
TOLERANCES:  
LINEAR:  
ANGULAR:

FINISH:

DEBURR AND  
BREAK SHARP  
EDGES

DO NOT SCALE DRAWING

REVISION

	NAME	SIGNATURE	DATE		
DRAWN	J.S.B.				
CHK'D					
APPV'D					
MFG					
Q.A					
				MATERIAL:	
				WEIGHT:	

TITLE:

# CUB PIVOT BOLT SETUP

DWG NO.

## CUB BOLT SETUP

A4

SCALE:1:20

SHEET 1 OF 1

6

5

4

3

2

1

A

A